

4-27-00
A
JOHNSON & STAINBROOK, LLP
Registered Patent Attorneys
Patents, Trademarks, Copyrights
and Related Matters

Marin County Office:
175 N. Redwood Dr., #130
San Rafael, CA 94903
TEL: 415.499.8822
FAX: 415.472.4347

Sonoma County Office:
3550 Round Barn Blvd. #203
Santa Rosa, CA 95403
TEL: 707.578.9333
FAX: 707.578.3133

April 25, 2000

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of
James D. McCarten for a STRUTLESS BUILDING MODULE AND METHOD OF
USING TO ASSEMBLE DOME STRUCTURES.

Enclosed are the following:

Specification and Claims (18 pages);


Drawings (8 sheets, informal);

Declaration and Power of Attorney;

Verified Statement Claiming Small Entity Status
(Independent Inventor); and

Check for the filing fee of \$345.00.

Very truly yours,


Larry D. Johnson
Registration #31,528
Attorney for Applicant

LDJ:bms

Enc.



Applicant or Patentee: James D. McCarten

Serial No.: _____ Filing Date: _____

Patent No.: _____ Issued: _____

For: _____

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY
STATUS (37 CFR 1.9(f) AND 1.27(b))—INDEPENDENT INVENTOR**

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office and with regard to the invention entitled

**STRUTLESS BUILDING MODULE AND
METHOD OF USING TO ASSEMBLE DOME STRUCTURES**

described in

☒ the application filed herewith
☐ application serial no. _____, filed _____
☐ patent no. _____, issued _____

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey or license any rights in the invention is listed below:

☒ no such person, concern or organization
☐ persons, concerns or organizations listed below*

*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27).

FULL NAME: _____

ADDRESS: _____

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b)).


I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF INVENTOR:

James D. McCarten

Date:


4/25/2000


Signature of Inventor

Johnson & Stainbrook, LLP
(415) 499-8822

"Express Mail mailing label no.: EL350248748

Date of Deposit: 4-25-00
I hereby certify that this paper or fee is
being deposited with the United States
Postal Service "Express Mail Post Office
to Addressee" service under 37 CFR 1.10 on
the date indicated above and is addressed
to: Commissioner of Patents and
Trademarks, Washington, D.C. 20231.


Larry D. Johnson
Reg. No. 31,528

U.S. UTILITY PATENT APPLICATION

OF

JAMES D. MCCARTEN

FOR

STRUTLESS BUILDING MODULE AND

METHOD OF USING TO ASSEMBLE DOME STRUCTURES

STRUTLESS BUILDING MODULE AND METHOD OF USING TO ASSEMBLE DOME STRUCTURES

BACKGROUND OF THE INVENTION

Cross-References to Related Applications

Not applicable.

Field of the Invention

The present invention relates generally to geodesic domes, and more particularly to a strutless polygonal building module having a center connecting device adapted to an efficient top-down method of assembling a plurality of said modules into a domical structure using a boom-free pole hoist.

Discussion of Related Art

The geodesic dome has long been used as the basic design principle in a number of structures, including both permanent and portable structures. Its modular design allows for the transportation and assembly of large structures on even marginally improved sites. However, the assembly of geodesic domes is not as simple or as streamlined as it might be. Currently, the construction of most large scale geodesic domes require either scaffolding, a supporting framework, a crane, swinging boom or other hoisting equipment, or some combination of this equipment, and the equipment itself requires its own assembly and disassembly. Furthermore,

most dome assemblies entail the use of modules requiring a large number of connecting units including, for example, gussets, and connecting hubs and struts for the assembly of the individual triangular module sections or frame-wall sections.

Several solutions have been proposed to simplify and improve the construction of modular structures, including the design disclosed in U.S. Pat. No. 4,092,810 to Sumner, which teaches a domical structure constructed by mating right-hand and left-hand versions of scalene triangular panels. The panels are secured at their overlapping edges to form an integral reinforcing structure that requires no supporting framework. It may be constructed upwardly from its base or downwardly from its top.

U.S. Pat. No. 4,287,690 to Berger, et al discloses a domed structure constructed from flat triangular panels having abutment surfaces at their sides having continuous interengaging means adapted to insertively mate with adjacent panels. It is constructed upwardly from its base.

U.S. Pat. No. 5,732,514 to Organ teaches a domical structure comprising preformed sub panels bent at the proper angles and having a series of flanges around their perimeter to allow the panels to be bolted together. The sub panels are formed into quarter sections that are bolted together in the field, along with floor sections to make a complete structure.

However, none of the foregoing designs or other known prior art disclose building modules, and more particularly a module having a center connecting device, specifically adapted for assembly in the top-down fashion. Additionally, none teaches a module including a disc member for containing wall-finishing materials within each building module prior to assembly into a structure. The present invention includes such structures and therefore represents an improvement over known portable dome structures and methods for constructing such structures.

SUMMARY OF THE INVENTION

The strutless building module of the present invention comprises a polygon having a plurality of inclined faces that converge at the module center. At the module center is a center connector comprising an integral center connector bolt and a connector washer held in position over the center connector bolt by a conventional, center-connecting nut.

The building module further includes sides that depend downwardly from associated module faces at an approximate angle of 83 degrees (83°). Adjoining module faces and sides intersect in an upper vertex, and the corresponding adjoining sides further intersect in a lower vertex. Each side has a plurality of insertion holes passing entirely through the side, wherein adjoining modules may be connected by placing modules side to side, upper vertex to upper vertex and lower vertex to lower vertex, and aligning the insertion holes so that an insertion bolt may be placed through the insertion hole and secured with a nut. The modules have an elevated center, which constitutes the convergence of the faces, each of which rises from the face's outer edge at an angle of approximately thirteen degrees (13°). First and second preferred embodiments of the inventive module comprise a pentagon and a hexagon, respectively.

The module optionally includes a disc member, concentric with the center connector washer and similarly held in place by a nut. This disc can be employed to provide increased structural integrity to the module and/or as means for holding insulating material, wallboard, paneling, wall covering, or the like, between the disc and the interior surface of the module. Additionally, if the modules are fabricated from materials suitably transparent for greenhouse house, the disc may be fabricated from transparent material, polarized, and electronically and/or

mechanically driven to carefully control the passage of light into the structure. In this fashion, the structure may be converted into a biosphere tailored to the light cycle of certain plant species.

To provide the optimum strength for larger structures, the sides and the intersections of the module faces can be reinforced with a laminated hub-and-spoke configuration. The module
5 may be fabricated from any of a number of suitable materials, including, among others, wire-mesh reinforced concrete, fiberglass, and several lightweight plastics. The geometry of the module lends itself to manufacture using a simple two part mold, making mass production not only possible but economical, rapid, and easily implemented in relatively undeveloped, unindustrialized circumstances.

The inventive strutless modules are connected at their sides by positioning a first module
10 relation to an adjoining second module such that the respective sides of each module are approximated and the insertion holes are aligned. Bolts are inserted through each hole, a washer is placed over each bolt, and a nut is then placed and tightened down onto each bolt.

Also disclosed is a method of assembling the inventive modules. This method comprises
15 a first step of erecting a boom-free hoist in a substantially vertical position such that its base is located at substantially the intended center of the dome structure. The hoist comprises a vertical support member which may be sunk into the ground or otherwise structurally supported. A comealong or ratchet winch is connected to the vertical support member near the base of the hoist using an eye bolt passing through the vertical support member. A cable connected to the
20 winch via a hook passes upwardly to the upper end of the hoist and through a hoist pulley, then downwardly to a terminal heavy hook.

Next, an array of modules is then placed around the base of the hoist, and each of the

modules is connected to form what will become the uppermost section of the dome, excluding the topmost module. Connection cables are assembled and connected at their lower ends to a center connecting bolt of one of the modules. The upper ends of the connection cables are connected to the heavy hook.

5 After connecting the connection cables to the center connectors and the heavy hook, the winch is positively operated to elevate this initial module layer above the ground. Construction continues in lifts as the hoist raises the dome to provide workers with a convenient and comfortable means to connect module after module to the lower sides of assembled modules.

10 There are numerous practical advantages of the inventive building module and method of assembling the module into a dome structure. Accordingly, it is an object of the present invention to provide a strutless building module that can be manufactured in a simple two part mold.

15 It is a further object of this invention to provide a building module having a center connecting device that enables the module to be assembled by one or more persons using a simple lifting device, specifically a boom-free hoist, which may be selectively incorporated into the completed structure or removed.

20 It is a further object of this invention to provide a building module that has substantial structural strength without the need for frame members.

25 It is yet another object of this invention to provide a building module that may be assembled into a dome structure using common hardware tools.

30 It is still another object of this invention to provide a building module that can incorporate wall materials, such as insulation, paneling, acoustic tiles or other sound attenuation

materials, and the like, before assembly.

It is another object of this invention to provide a center connect module suitable for use in hanging greenhouse plants.

It is a further object of this invention to provide a center connect module adapted for use as a hub when the modules and disc members are transparent to sunlight so as to electronically and/or mechanically rotate polarized discs positioned within the interior center of the module to maintain a consistent and controllable amount of sunlight throughout the day.

It is another object of this invention to provide a top-down method of assembling a dome structure using the inventive strutless building module that exploits the advantages of the module and further provides flexibility in orienting the structure during construction.

Finally, it is an object of this invention to provide a top-down method of assembling a dome structure such that construction activity is almost entirely restricted to working at ground level with a minimum of lifting.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1a is a top view of the strutless building module of the present invention, showing the module in its pentagonal embodiment;

Fig. 1b is a side elevation cross-sectional view of the module of Fig. 1a viewed along the cutting plane indicated in Fig 1a;

Fig. 2a is a top view of the strutless building module shown it in its hexagonal embodiment;

Fig. 2b is a side elevation cross-sectional view of the module of Fig. 2a viewed along the

cutting plane indicated in Fig. 2a;

Fig. 3 is a perspective view of the module of Figs. 2a and 2b, showing the interior side of the module faces and the center connecting bolt;

Fig. 4 is perspective view showing a first step in a method of assembling the inventive modules using a boom-free hoist;

Fig. 5 depicts a workman connecting modules from underneath a first course or lift;

Fig. 6 illustrates the dome under construction, with a first lift elevated above ground;

Fig. 7 is a side elevation view showing two means for attaching the top and final module when a top-down construction method is employed; and

Fig. 8 is a view showing a dome constructed of the modules pentagonal modules of the present invention.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

Fig. 1a is a top view of the strutless building module 10 of the present invention, showing the module in its first preferred, pentagonal embodiment. Fig. 1b is a side elevation cross-sectional view of the module of Fig. 1a viewed along the cutting plane indicated in Fig 1a. In this embodiment, each module has five substantially triangular faces 12, 12b, 12c, 12d, and 12e, preferably substantially flat and oriented so as to converge, on the exterior surface of the module 13, at a point substantially at the module center 14. A center connector 16 is positioned on the interior surface of the module 17 substantially at the module center, said connector comprising an integral center connector bolt 18 depending downwardly when the module is laid flat on its interior edge 20. A center connector washer 22 is held positioned over the center connector bolt

and held in place by a conventional, center-connector nut 24.

The first preferred embodiment of the building module of the present invention further includes five sides, 26a through 26e, each of which depends downwardly from it associated module face at an approximate angle 28 of 83 degrees. Adjoining module faces and sides intersect in an upper vertex 30, and the corresponding adjoining side further intersect in a lower vertex 32. Each side has a plurality of insertion holes 34 passing entirely through the side. When adjoining modules are placed side by side, upper vertex to upper vertex and lower vertex to lower vertex, the insertion holes are aligned so that an insertion bolt may be placed through the insertion hole for connection of the modules.

The geometry of the first preferred embodiment is completed by its elevated center, which constitutes the convergence of the faces, each of which rises from the face's outer edge 36, defined by a straight segment joining its two upper vertices, at an angle 38 preferably of approximately thirteen degrees (13°).

Fig. 2a is a top view of the strutless building module 40 shown in its second preferred, hexagonal embodiment, and Fig. 2b is a side elevation cross-sectional view of the module of Fig. 2a viewed along the cutting plane indicated in Fig. 2a. The hexagonal embodiment has six faces, 42a through 42f, and six sides, 44a through 44f. As in the first preferred embodiment, the hexagonal embodiment includes a center connector 46 positioned at the module center, the connector comprising an integral center connector bolt 48 depending downwardly when the module is laid flat on its interior edge 50, and a center connector washer 52 positioned over the center connector bolt and held in place by a conventional nut 54. Each of the six sides are substantially flat and depend downwardly from associated module faces at an approximate angle

56 of 69 degrees (69°), and adjoining module faces and sides again intersect in an upper vertex 58, and the corresponding adjoining sides intersect in a lower vertex 60. While 69° is the preferred angle, any angle within the range of 64° to 74° will provide an effective joint between adjoining modules. Each side also has a plurality of insertion holes 62 passing entirely through the module side.

As in the first preferred embodiment, the geometry of the second embodiment includes an elevated center, where the inclined planes of the module faces converge, each of the faces rising from the face's outer edge 64 at a preferred angle 66 of approximately thirteen degrees (13°), said outer edge defined by a straight segment joining the face's two upper vertices. Although 13° is the preferred angle for the faces, any angle ranging from 8° to 18° may work equally well.

Figs. 2a and 2b also illustrate an optional disc 67, shown in phantom in Fig. 2a, said disc being substantially circular and concentric with center connector washer and similarly held in place by nut 54, said disc having a convex side 68 and a concave side 69, the former in approximation with the interior surface 70 of the module. The outer circumference 71 of the disc preferably engages the sides of the module. This disc can be employed to provide increased structural integrity to the module. Additionally, the disc can be employed to function as means for holding insulating material, wallboard, paneling, wall covering material, acoustic tiles or other sound attenuation material, and/or a combination of these or other materials between the convex side 68 of the disc and the interior surface 70 of the module. This provides the distinct advantage of effectively finishing the wall prior to installation, and therefore prior to having a wall or ceiling height. The disc may also be employed as a polarizing light filter when the modules are fabricated from materials suitably transparent for use in a greenhouse. Furthermore,

the discs can be collectively motorized and synchronized to individually rotate as the sun passes overhead. In this fashion, the discs and modules can be orchestrated to provide a tightly controlled amount of sunlight into a greenhouse interior, and the growth of highly sensitive plant species can be enhanced.

5 Fig. 3 is a perspective view of the module 80 of Figs. 2a and 2b, showing the interior surfaces of the module faces 82a through 82f, and integral center connecting bolt 84. This view illustrates how the intersections of the module faces can be reinforced with spokes 86 comprised of laminated fabrication material. In the case of fiberglass, for example, the spokes may consist of a lay up of mat and resin. It will be readily appreciated that the specific manufacturing processes must be adapted to the materials used in fabrication.

10 Fig. 4 is a perspective view showing a first step in assembling the inventive modules using a boom-free hoist 90. Construction of a geodesic dome using either of the embodiments described herein consists of only a few simple steps. After fabrication of the strutless modules, the boom-free hoist is erected in a substantially vertical position such that its base 92 is located in the planned center of the dome structure. The hoist comprises a vertical support member 94,
15 which may be sunk into the ground G, or otherwise supported with other support members. Near its base, the hoist includes a comealong, or ratchet winch 96, connected to the vertical support member with an eye bolt 98 passing through the vertical support member. A cable 100 connected to the winch at hook 102 passes upwardly to the upper end of the hoist and through a
20 hoist pulley 104 connected to the vertical support member, after which it depends downwardly and terminates in a heavy hook 106.

Next, using the second preferred embodiment for purposes of illustration, an array of five

modules, 108a through 108e, is positioned around the base of the hoist, and each of the modules is connected in the manner described above to form the uppermost section of the dome, excluding the topmost module. When thus connected, the modules form an upper course constituting a kind of skirt around the hoist. Five connection cables, 110a through 110e, are then assembled and the end of each cable is connected to the module center connector bolt of one of the modules and secured in place by the center connecting nut. The upper ends of the respective connection cables are connected at their respective upper ends to heavy hook 106. Preferably, rubber sleeves 112 are interposed between the upper and lower ends of the connection cables and positioned at the point where the cables rub the edges of the modules so that the cables do not cause damage to the modules as the dome is erected.

Fig. 5 is a perspective view showing a workman connecting modules from underneath the first lift, or course, assembled in the manner described above. This view particularly shows how the strutless modules are connected at their sides. This view highlights the simplicity and convenience of erecting a structure using the modules of the present invention. Specifically, a first module 120 is positioned in relation to an adjoining second module 122 such that the respective sides, 124 and 126, of each module are approximated and the insertion holes are aligned. Bolts 128 are then inserted through each hole, a washer 130 is placed over each bolt, and a nut 132 is then placed and tightened down onto each bolt using a conventional wrench 134.

An alternative means of connecting modules would entail the use of adhesive material. This would provide a relatively clean finish but would detract from the flexibility afforded by the nuts and bolts assembly. Additionally, it would make the structure essentially permanent. C-clamps, or some variation thereof, are also alternative fastening means. Rather than connecting

the modules using nuts and bolts, the clamp member could simply be fitted over the edges of adjoining modules and tightly screwed down. While not as elegant as a bolted structure, this too would virtually eliminate the need for tools in the assembly process and would still provide for flexibility during construction and for easy disassembly after construction.

5 It is worth noting that the module of the present invention may be fabricated from any of a number of suitable materials, including, among others, wire-mesh reinforced concrete, fiberglass, and several lightweight plastics, including generally transparent plastics suitable for use in greenhouse structures. The geometry of the module lends itself to manufacture using a simple two part mold, making mass production of the modules not only possible, but economical and rapid.

After connecting the connection cables to the center connectors and the heavy hook, the winch is positively operated to elevate the uppermost dome section of modules above the ground. This first elevated stage 140 is illustrated in Fig. 6, showing a first lift 142 hoisted above the ground, G, and held in the elevated position by the winch and cable connecting assembly 144 described above. Construction then continues in courses, or lifts: the hoist is employed to raise the dome under construction to provide workers with a convenient and comfortable means to connect module after module to the lower sides of assembled modules. The lifts are repeated until the dome is constructed to the desired extent, commonly $1/2$, $3/8$, or $5/8$ of sphere.

As will be readily appreciated, with few exceptions, the workers are always working safely on the ground and without any need of scaffolding, ladders, or a supporting framework. There is an absolute minimum of tools required in the construction. After erecting the boom-free hoist, a simple hand wrench is all that is required for construction. Furthermore, there are no

complex construction techniques or skills required of the workers; little more than tightening bolts is entailed after positioning the hoist. This top-down construction has numerous advantages, not the least of which is that there is never any heavy lifting or transport of modules onto elevated work spaces. Besides the obvious safety advantages, the modules may be easily aligned and positioned for connection to the structure. In fact, the entire dome may be adjusted and repositioned at any point in construction before securing the dome to its base by pivoting or rotating the structure under the connecting cables. If, for some reason, it is decided that a precut door or window ought to face in a slightly different direction than was planned at the outset of construction, the dome's orientation can be substantially altered without any disassembly and reconstruction. This provides maximum flexibility and cuts down on the need to make unalterable decisions before commencing construction.

The boom-free hoist may be incorporated into the completed structure to function in a variety of ways. For example, it may simply be retained to provide support. Alternatively, or in addition, it may function as the primary vertical support for a spiral staircase or duct work. If an entirely open interior space is desired or required, the hoist may be removed. In the event the boom-free hoist is to be removed, provision must be made for connecting a final, uppermost module. Several options may be employed to connect the final module. As shown in Fig. 7, for small to medium sized domes, the top module 150 may be fastened by at least one hinge 152 to the first course before the course is elevated. The module is then left in an open position to leave the boom opening unobstructed. A tether 154 may then be connected to the module vertex or side directly opposite the hinge and after the boom is removed, it may be pulled to pivot to swing the module into its open hole, where it will simply drop in and settle perfectly into place.

Alternatively, rather than using a tether, a simple extension pole 156 may be used to push the module so that it pivots on the hinge. In either case, the builder may connect the bolts for the final module either by using means well known in the art to work above ground, such as a ladder, scaffolding, or a cherry picker, or he or she may elect to fasten the bolts using tools connected to extension poles.

Fig. 8 is a view showing a dome constructed of the modules pentagonal modules of the present invention. This view illustrates a completed dome 160 having an arched doorway 162 and a window dormer 164. Such features may be incorporated by cutting openings and adding structure after assembly, or alternatively by precutting the modules and fitting them appropriately during assembly.

While this invention has been described in connection with preferred embodiments thereof, it is obvious that modifications and changes therein may be made by those skilled in the art to which it pertains without departing from the spirit and scope of the invention. Accordingly, the scope of this invention is to be limited only by the appended claims.

CLAIMS

What is claimed as invention is:

1. A strutless building module for use in assembling a domical structure, said
5 module comprising:

a polygonal member having a center, an exterior surface, an interior surface, a plurality of
sides, a lower edge, and a plurality of faces each one of which has an outer edge intersecting one
of said sides and inclined upwardly from said side so that said plurality of faces converge in a
point at substantially the center of said polygonal member;

10 a center connector affixed to said center of said polygonal member, said center connector
comprising a center connecting bolt, a center connecting washer, positioned over said center
connecting bolt, said center connecting bolt depending downwardly from said interior surface of
said module when said module is laid flat on its lower edge; and

15 connection means for assembling a plurality of said polygonal members into a domical
structure.

2. The strutless building module of claim 1 wherein said connection means
comprises a plurality of bolts and complementary nuts, and wherein each of said sides of said
polygonal member includes at least one aperture for insertion of one of said bolts.

3. The strutless building module of claim 1 wherein said center connector bolt is
20 integrally formed into said polygonal member.

4. The strutless building module of claim 1 wherein each of said sides depends
downwardly from said exterior surface of said polygonal member at an angle in the range of 64

to 74 degrees.

5. The strutless building module of claim 1 wherein each of said faces is inclined upwardly from its outer edge to the center of said module at an angle in the range of eight to eighteen degrees.

6. The strutless building module of claim 1 wherein said polygonal member is substantially pentagonal.

7. The strutless building module of claim 1 wherein said polygonal member is substantially hexagonal.

8. The strutless building module of claim 1 further including a disc member, said disc being substantially circular and concentric with center connector washer, said disc having a convex side and a concave side, said convex side in approximation with the interior surface of said module.

9. The strutless building module of claim 8 wherein said disc member has a circumference that engages the sides of the module.

10. The strutless building module of claim 8 wherein said disc member is fabricated from polarized transparent material.

11. A method of assembling a modular domical structure, comprising the steps of:
providing a plurality of strutless building modules, said modules comprising polygonal members having a center, an exterior surface, an interior surface, a plurality of sides, a lower edge, and a plurality of inclined faces each one of which has an outer edge intersecting one of said sides and oriented so as to converge in a point at substantially the center of said polygonal member, a center connector affixed to said center of said polygonal member, said center

connector comprising a center connecting bolt, a center connecting washer, positioned over said center connecting bolt, said center connecting bolt depending downwardly from said interior surface of said module when said module is laid flat on its lower edge, and connection means for assembling a plurality of said polygonal members into a domical structure;

5 erecting a boom-free hoist having an upper end and a base, said hoist having a vertical support member disposed in a substantially vertical position, a winch connected to the vertical support member near the base via connection means, a hoist pulley located proximate the upper end of the hoist, a cable operatively connected to the winch and passing upwardly through the hoist pulley and then downwardly where it terminates in a heavy hook;

10 positioning an array of modules around the base of the hoist;

connecting each of the modules using the connection means so as to form an upper course;

providing at least one connecting cable having means for connection to the heavy hook and the center connecting bolt of a building module;

15 connecting at least one center connector bolt of each of said modules forming the upper course to the heavy hook using at least one connecting cable;

elevating the upper course upwardly using the winch; and

adding further building modules to the elevated modules in due order to form a plurality of courses until the dome is constructed to the desired extent.

STRUTLESS BUILDING MODULE AND
METHOD OF USING TO ASSEMBLE DOME STRUCTURES

ABSTRACT OF THE DISCLOSURE

A strutless building module comprising a polygon having a plurality of inclined faces that converge at the module center, said module center having a center connector, said module further having sides that angle downwardly from their respective module faces and including a plurality of insertion holes passing entirely through the side, wherein adjoining modules may be connected by placing modules side-to-side and passing bolts through aligned insertion holes. The modules have an elevated center formed at the convergence of the inclined module faces. The method of assembling the inventive modules into a dome structure comprises erecting a boom-free hoist at the intended center of the dome, said hoist having a winch and cable apparatus; connecting an array of modules into a first lift; connecting said cable apparatus to the center connectors of each module; elevating the first lift; connecting modules to the underside of the modules comprising the first lift; and thereafter repeating this process until the desired dome is completed.

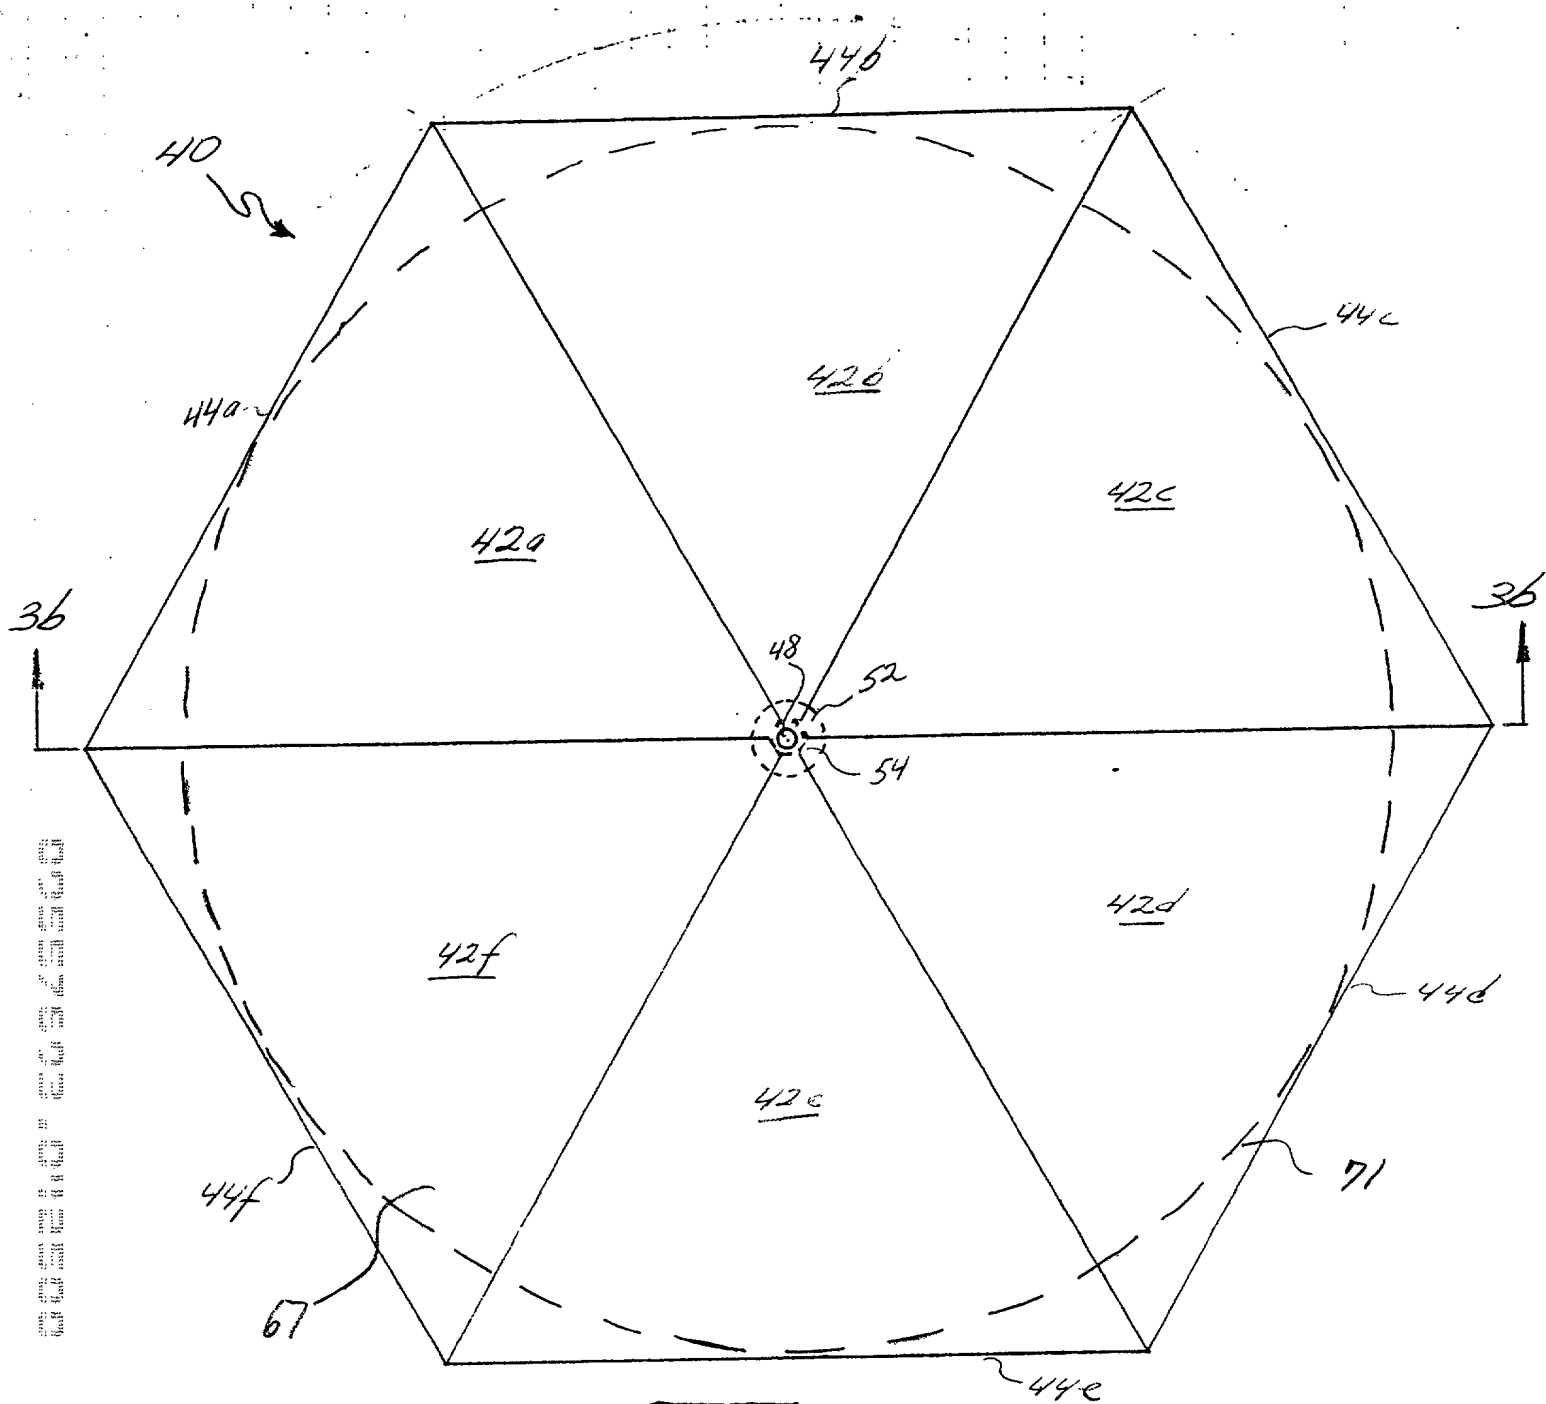


FIG 2a

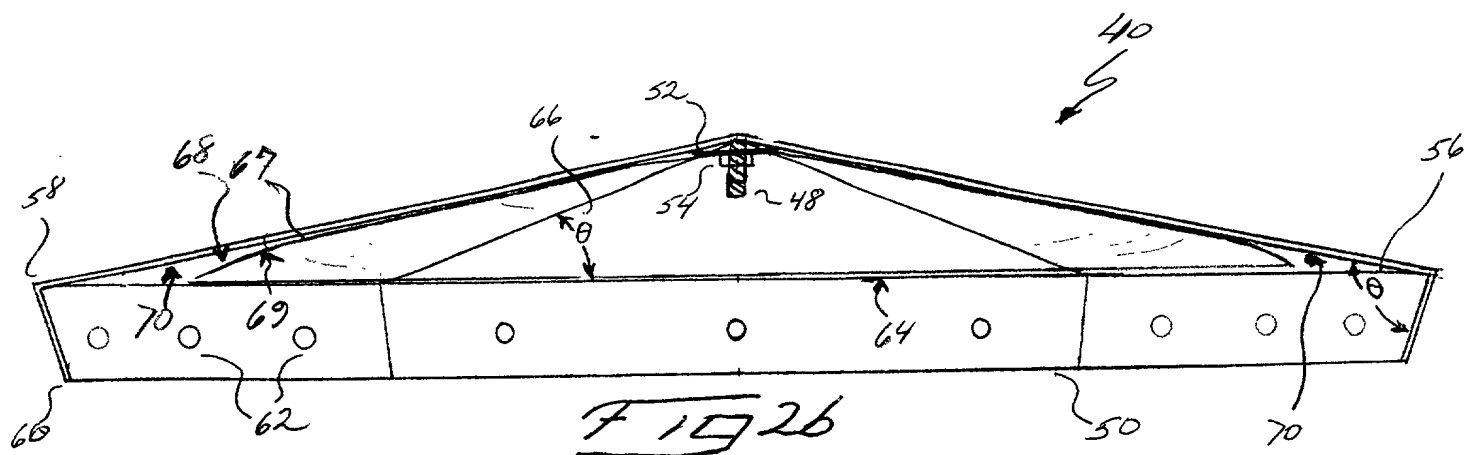


FIG 2b


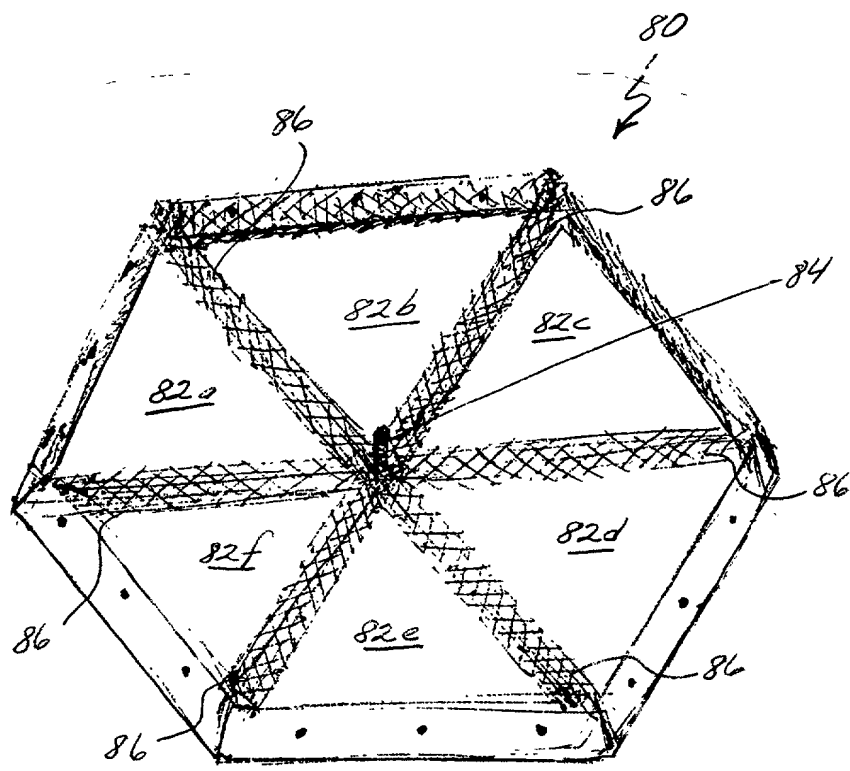


FIG 3

FIG 4

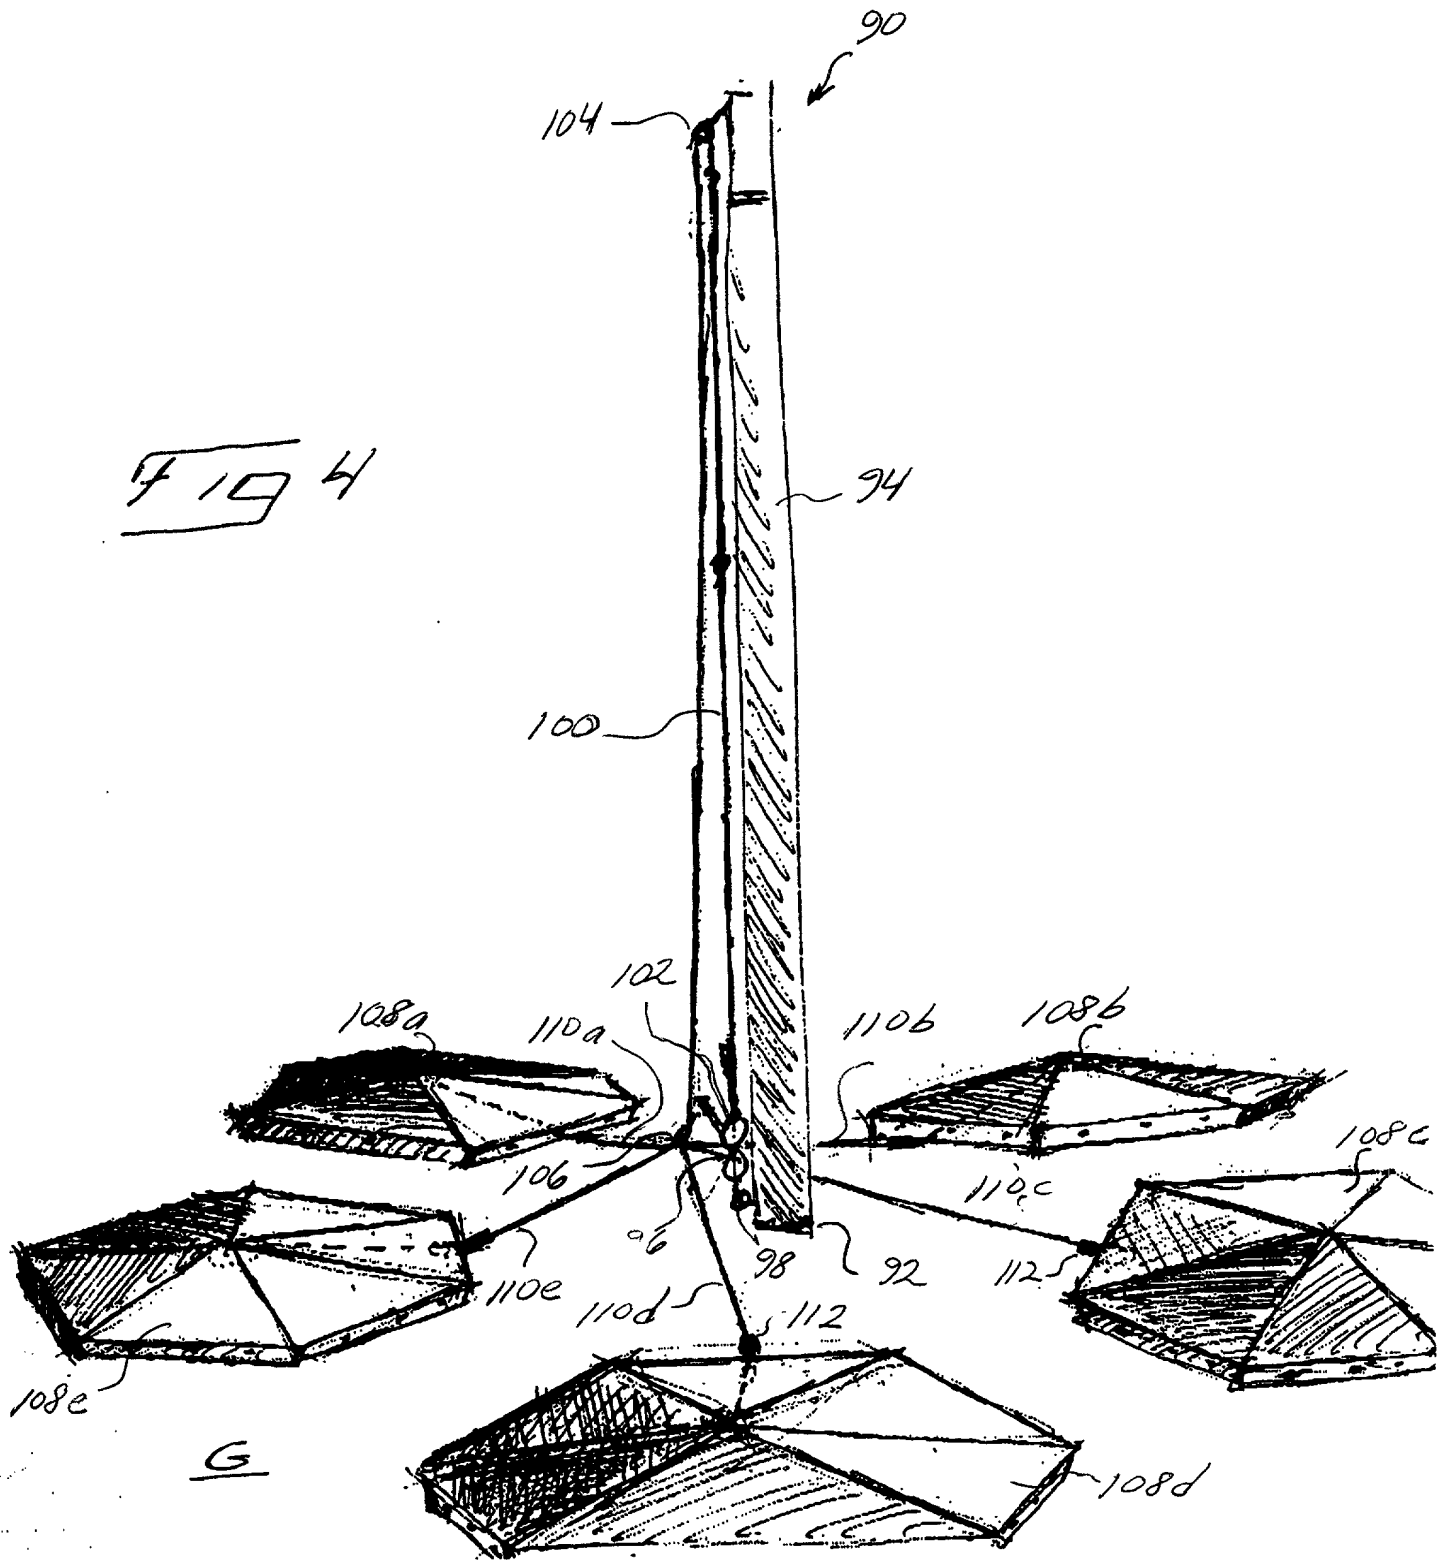

G

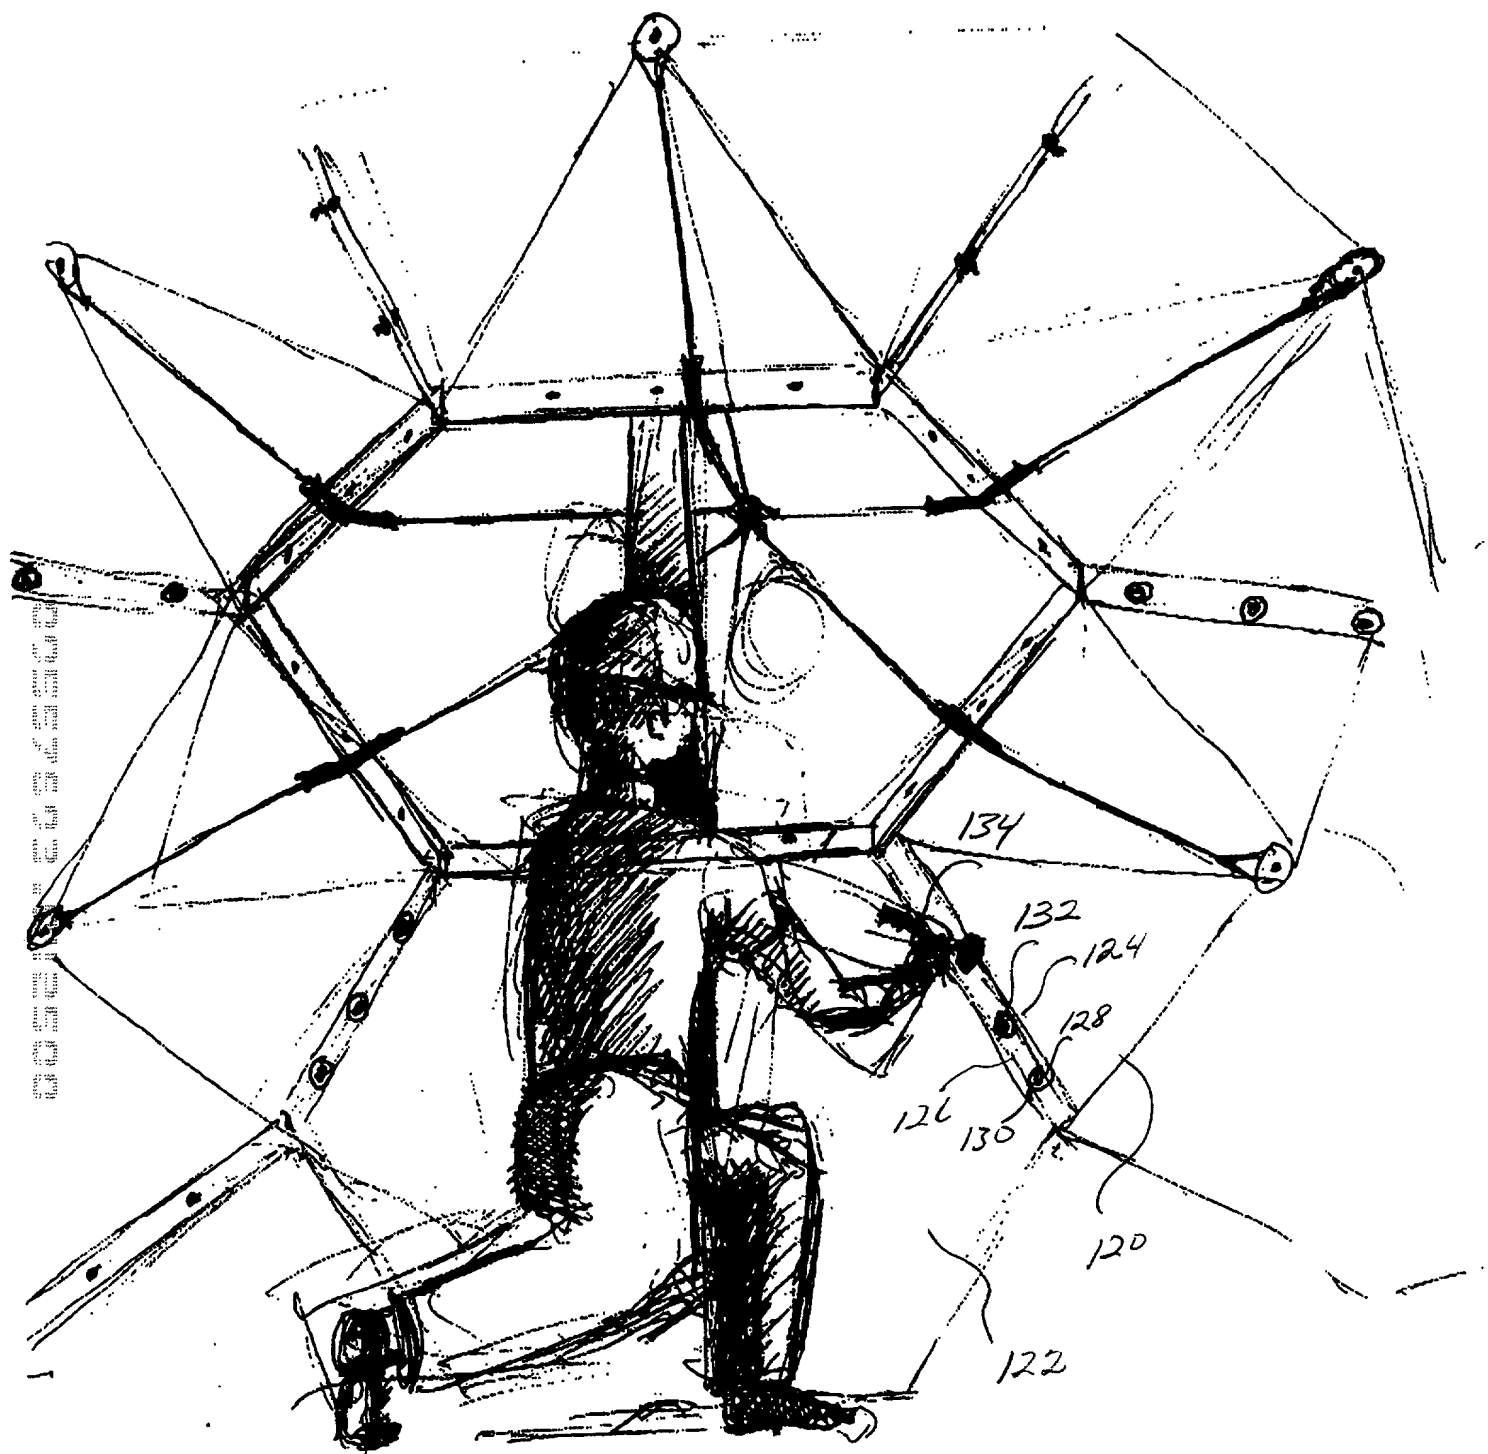


FIG 5

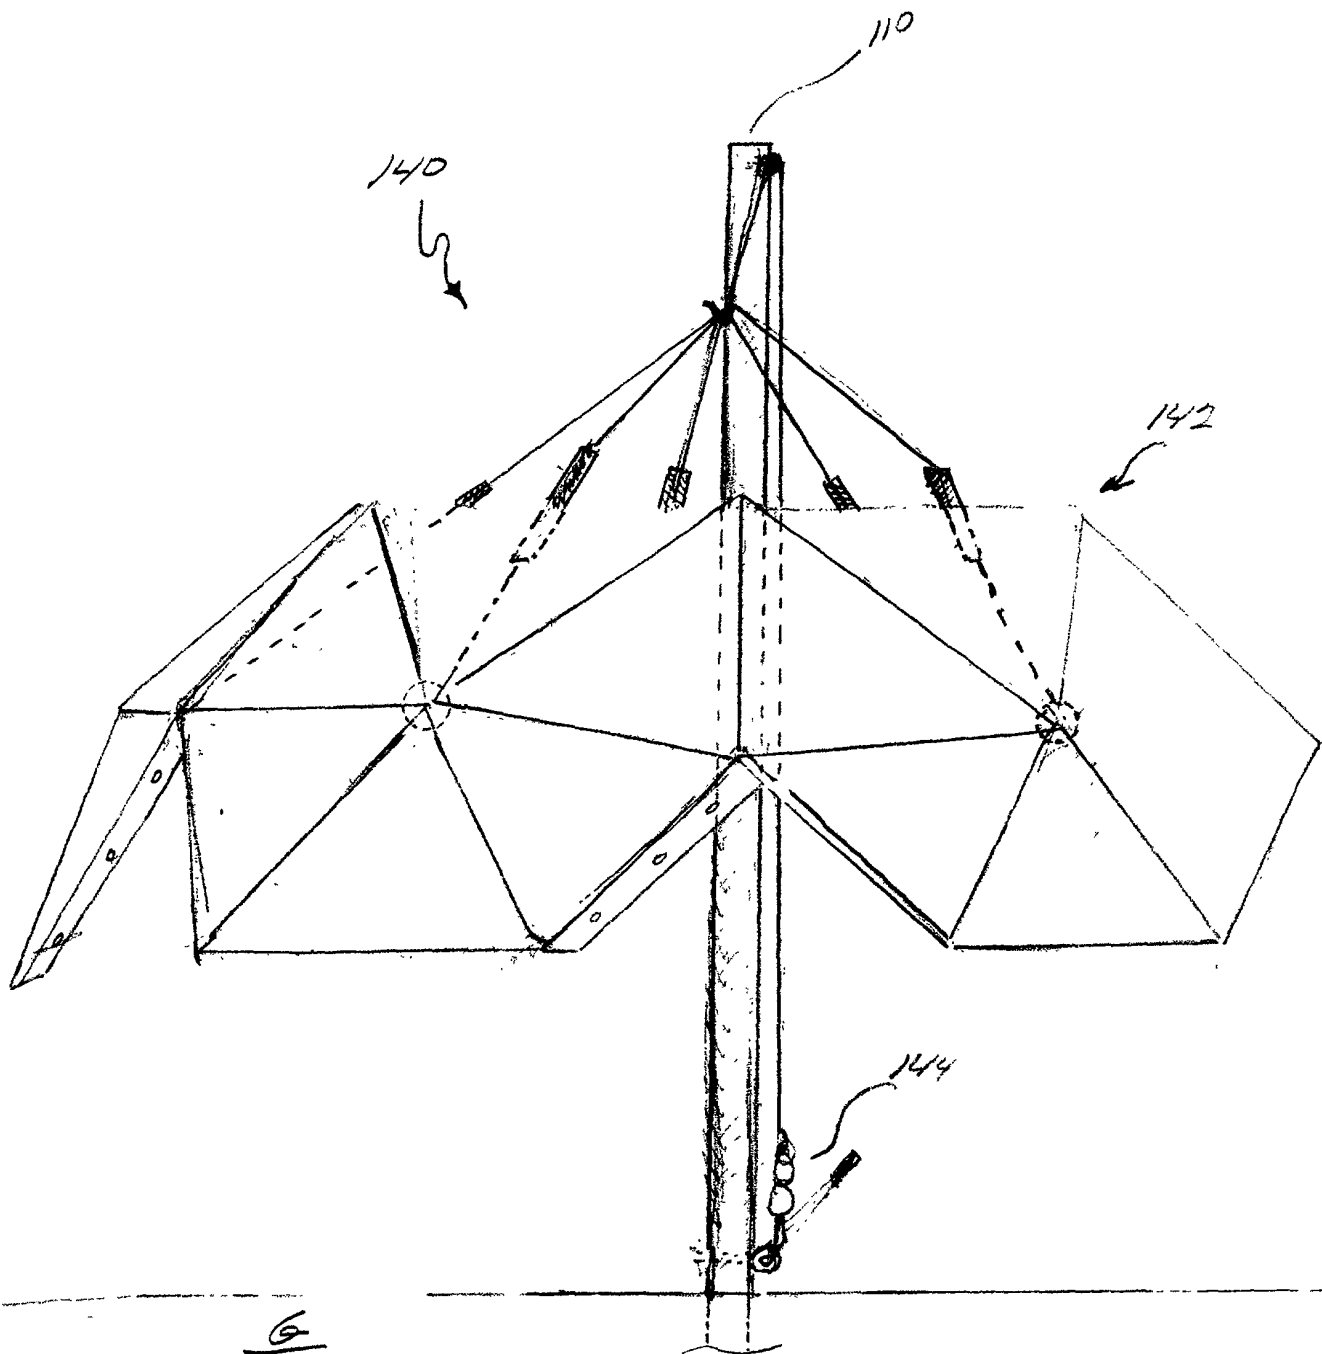


FIG 6

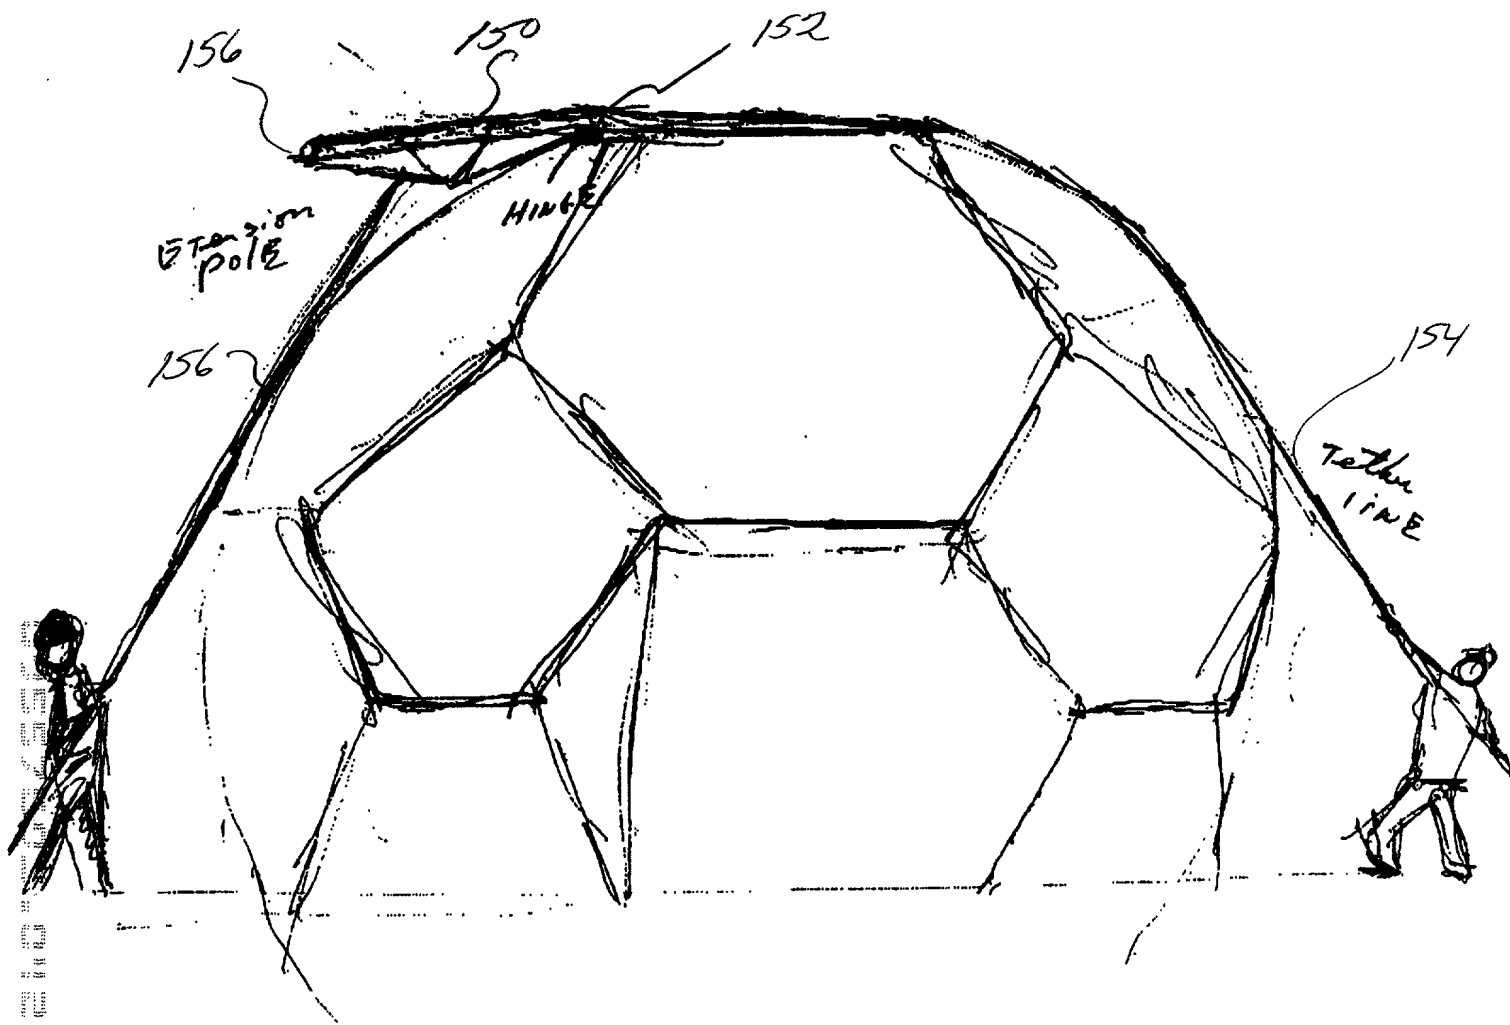


Fig 7

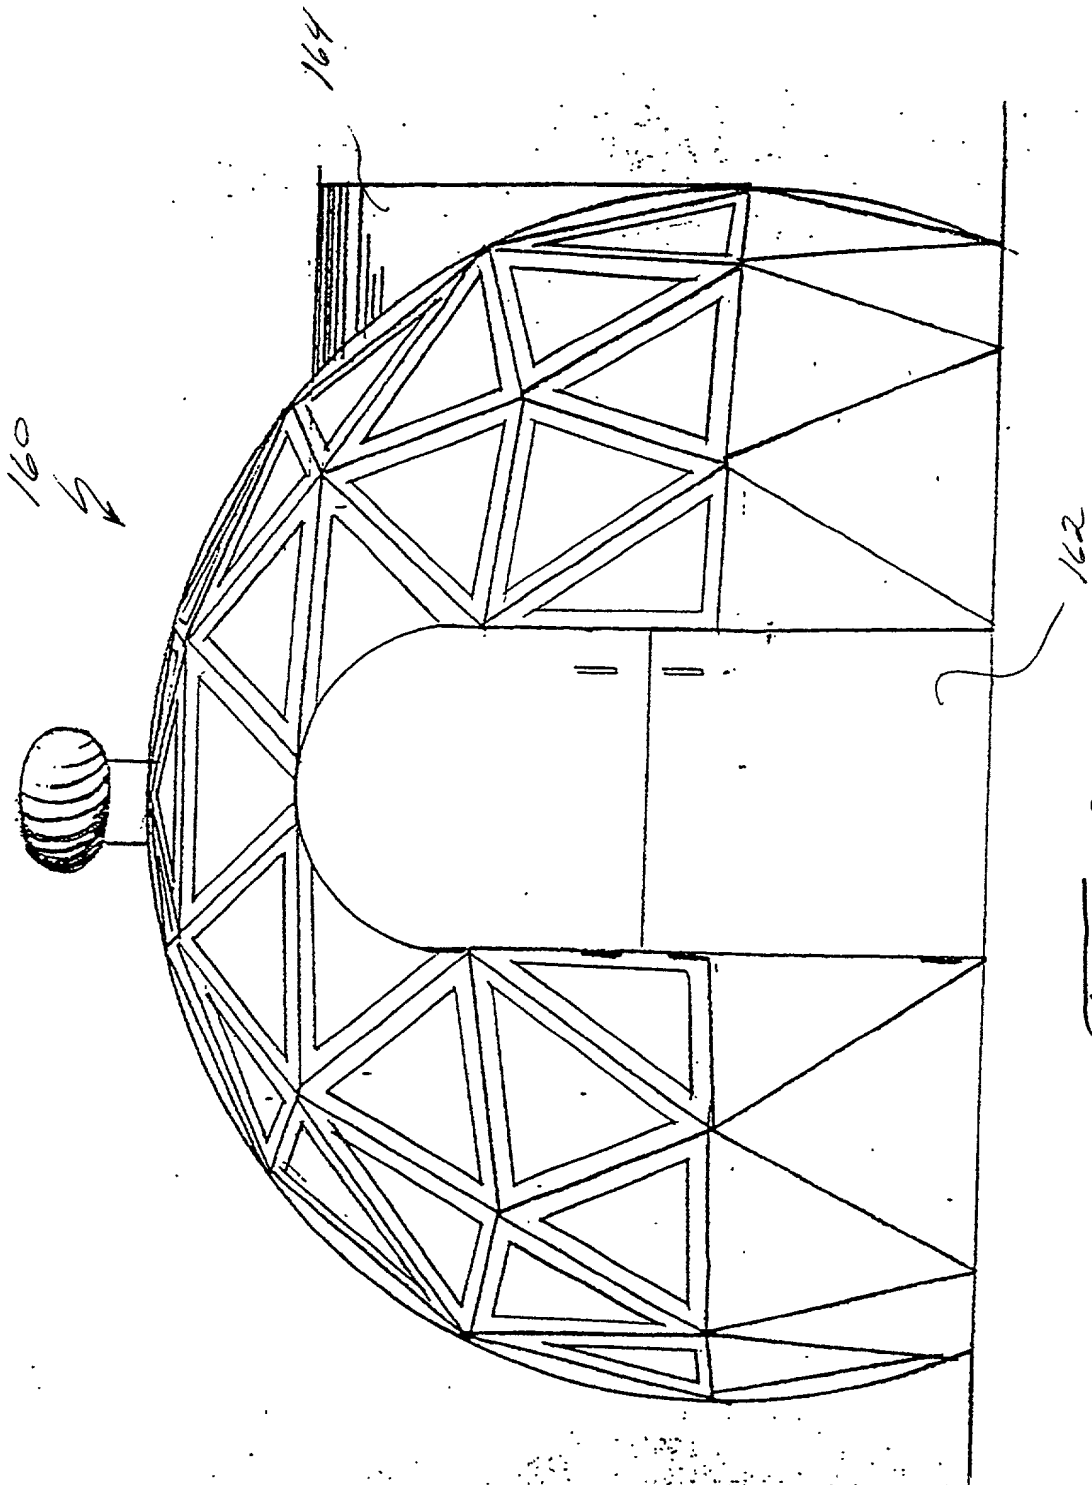


FIG. 8

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **STRUTLESS BUILDING MODULE AND METHOD OF USING TO ASSEMBLE DOME STRUCTURES**, the specification of which [X] is attached hereto or [] was filed on _____ as Application Serial No _____, and was amended on _____ (if applicable).

I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, section 1.56(a). I claim foreign priority benefits under Title 35, United States Code, section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):

<u>COUNTRY</u>	<u>APPLICATION NUMBER</u>	<u>DATE OF FILING</u>	<u>PRIORITY</u> <u>UNDER 35 U.S.C. 119</u>
_____	_____	_____	Yes [] No []

I claim the benefit under Title 35, United States Code, section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPL. SERIAL NO. DATE OF FILING

_____ [] Patented [] Pending [] Abandoned

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney to prosecute this application and transact all business in the Patent and Trademark Office therewith:

Larry D. Johnson (Registration Number 31,528)
Craig M. Stainbrook (Registration Number 45,126)
address: 175 N. Redwood Drive, Suite 130
San Rafael, CA 94903
telephone: (415) 499-8822

FULL NAME
OF INVENTOR:

<u>McCarten</u>	<u>James</u>	<u>D.</u>
Last Name	First Name	Middle Name or Initial

RESIDENCE &
CITIZENSHIP:

<u>Petaluma</u>	<u>California</u>	<u>U.S.A.</u>
City	State or Country	Country of Citizenship

POST OFFICE
ADDRESS:

<u>500 Kentucky Street</u>	<u>Petaluma, CA</u>	<u>94954</u>
Address	City State or Country	Zip Code

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Date: April 25, 2000

Signature of Inventor

Johnson & Stainbrook LLP
Telephone (415) 499-8822